

FINAL ALTERNATIVE ASSESSMENT

(COVER PAGE)

Session : April 2021

Programme : Diploma In Mechanical Engineering (DMEN)

Course : **EGM1180: Mechanics Of Engineering Materials**

Date of Examination : 30 July 2021 (Friday)

Time : 12.00pm – 2.30pm Reading Time : Nil

Duration : 2 Hours : 30 Minutes

Note: 30 minutes is added into the duration of the examination to factor in any connectivity matters and for you to scan and upload your scripts.

Special Instructions :

Answer **ALL** the questions

Materials permitted : Nil

Materials provided : Nil

Examiner(s) : Soo Swee Yoong and Mohammad Faiz

Moderator : Tham Chan Seng

This paper consists of 5 printed pages, including the cover page

DIPLOMA IN MECHANICAL ENGINEERING PROGRAMME (DMEN)
EGM1180: MECHANICS OF ENGINEERING MATERIALS
FINAL ALTERNATIVE ASSESSMENT: APRIL 2021 SESSION

Instruction: This paper consists of **FOUR (4)** questions. Answer all **FOUR (4)** questions. All questions carry equal marks.

Question 1

For the stressed element shown in Figure Q1, calculate

- (a) The normal and shear stresses on the plane AB, (8 marks)
- (b) The principal stresses, (4 marks)
- (c) The maximum shear stresses, (3 marks)
- (d) Show the position of the principal planes on a suitable diagram. (10 marks)

(Total: 25 marks)

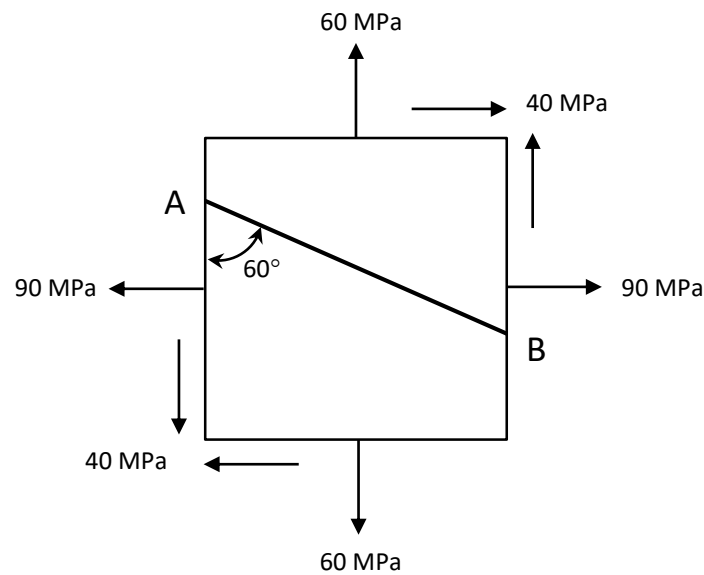


Figure Q1

Question 2

- (a) Figure Q2a shows a beam that is subjected to an internal moment of $M = 75 \text{ kNm}$, determine the maximum tensile and compressive stress acting in the beam.

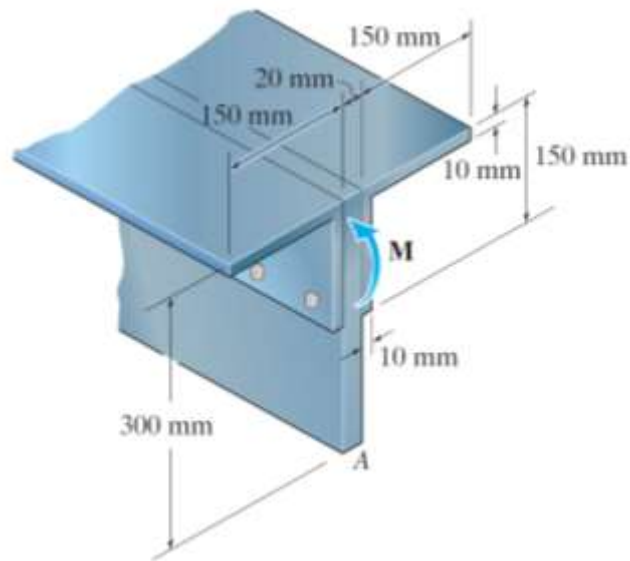


Figure Q2a

(15 marks)

- (b) Determine the largest bending moment M that can be applied to the beam shown in Figure Q2b. Take the allowable stress as 155 MPa and neglect the effect of fillets.

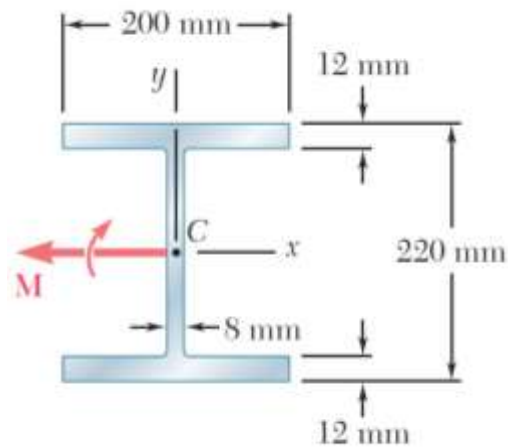


Figure Q2b

(10 marks)

(Total: 25 marks)

Question 3

- (a) Determine the maximum shear stress in the member in Figure Q3a if a shear force, V of 90 kN is applied.

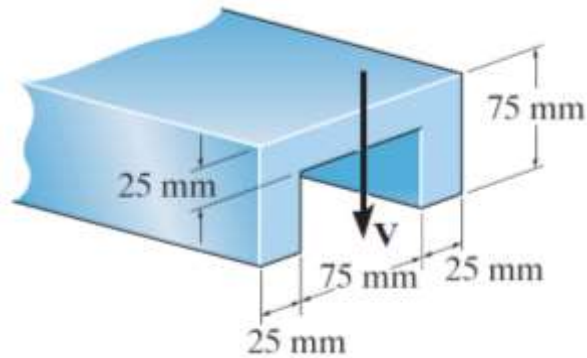


Figure Q3a

(13 marks)

- (b) As shown in Figure Q3b, three rectangular boards (each has a thickness of 50 mm) are joined together using nails to form a beam which is subjected to a vertical shear. Given the allowable shearing force in each nail is 600 N and the spacing ' s ' between the nails is 75 mm, determine the allowable shear stress.

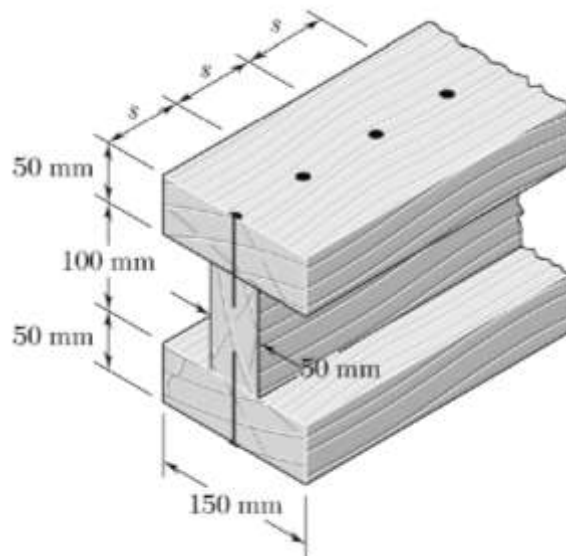


Figure Q3b

(12 marks)

(Total: 25 marks)

Question 4

The flexural stiffness (EI) of the loaded beam shown in Figure Q4 is 300 MPa. Calculate,

- (a) The reactions at each support, (3 marks)
 - (b) The slope at each support, (12 marks)
 - (c) The deflection at point B, C and D. (10 marks)
- (Total: 25 marks)**

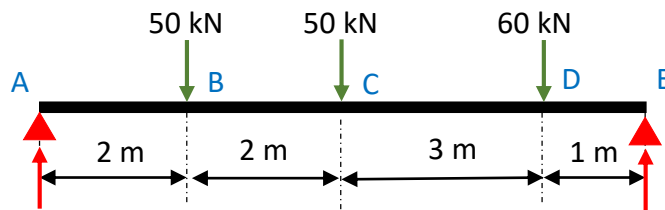


Figure Q4

~ The End ~

EGM1180/apr21/formatted